


FLOW CONTROL STUDY MATERIAL

Flow control describes the order in which statements will be executed at runtime.

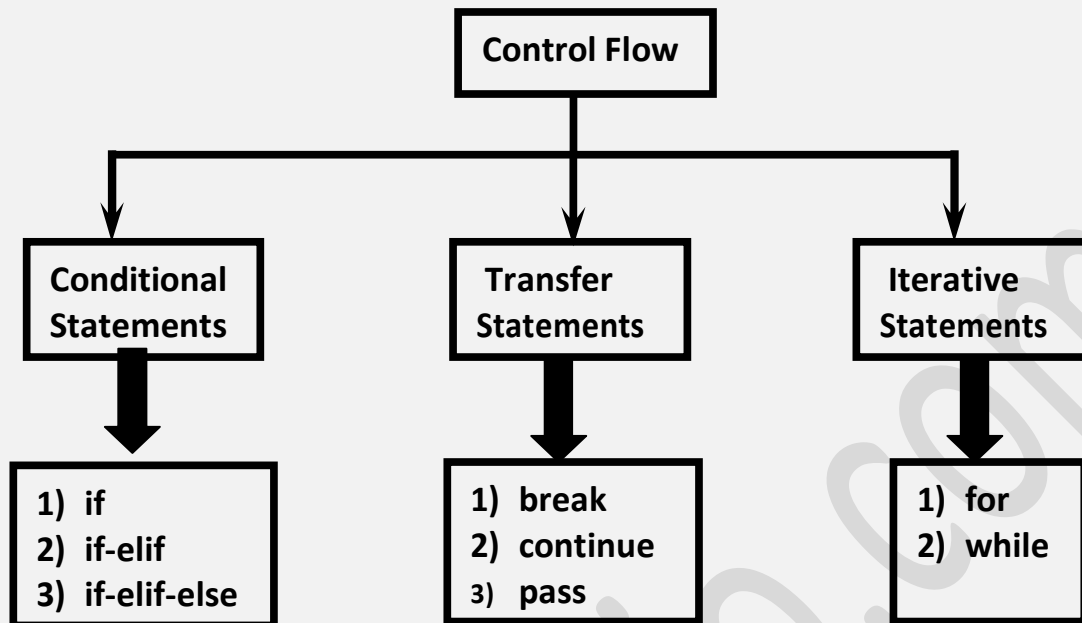

I. Conditional Statements

1) if

if condition : statement
OR

if condition :
statement-1
statement-2
statement-3

If condition is true then statements will be executed.

Eg:

```
1) name=input("Enter Name:")
2) if name=="durga" :
3)     print("Hello Durga Good Morning")
4) print("How are you!!!")
```

D:\Python_classes>py test.py

Enter Name:durga

Hello Durga Good Morning

How are you!!!
D:\Python_classes>py test.py
Enter Name: Ravi
How are you!!!

2) if-else:

if condition:
 Action-1
else:
 Action-2

if condition is true then Action-1 will be executed otherwise Action-2 will be executed.

```
1) name=input("Enter Name:")  
2) if name=="durga" :  
3)     print("Hello Durga Good Morning")  
4) else:  
5)     print("Hello Guest Good Moring")  
6) print("How are you!!!")
```

D:\Python_classes>py test.py
Enter Name:durga
Hello Durga Good Morning
How are you!!!

D:\Python_classes>py test.py
Enter Name:Ravi
Hello Guest Good Moring
How are you!!!

3) if-elif-else:

if condition1:
 Action-1
elif condition2:
 Action-2
elif condition3:
 Action-3
elif condition4:
 Action-4
...
else:
 Default Action

Based condition the corresponding action will be executed.

```
1) brand=input("Enter Your Favourite Brand:")
2) if brand=="RC" :
3)     print("It is childrens brand")
4) elif brand=="KF":
5)     print("It is not that much kick")
6) elif brand=="FO":
7)     print("Buy one get Free One")
8) else :
9)     print("Other Brands are not recommended")
```

```
D:\Python_classes>py test.py
Enter Your Favourite Brand:RC
It is childrens brand
```

```
D:\Python_classes>py test.py
Enter Your Favourite Brand:KF
It is not that much kick
```

```
D:\Python_classes>py test.py
Enter Your Favourite Brand: KALYANI
Other Brands are not recommended
```

Note:

1) else part is always optional. Hence the following are various possible syntaxes.

- 1) If
- 2) if – else
- 3) if-elif-else
- 4) if-elif

2) There is no switch statement in Python

Q) Write a Program to find Biggest of given 2 Numbers from the Commad Prompt?

```
1) n1=int(input("Enter First Number:"))
2) n2=int(input("Enter Second Number:"))
3) if n1>n2:
4)     print("Biggest Number is:",n1)
5) else :
6)     print("Biggest Number is:",n2)
```

```
D:\Python_classes>py test.py
Enter First Number:10
```

Enter Second Number:20
Biggest Number is: 20

Q) Write a Program to find Biggest of given 3 Numbers from the Commad Prompt?

```
1) n1=int(input("Enter First Number:"))
2) n2=int(input("Enter Second Number:"))
3) n3=int(input("Enter Third Number:"))
4) if n1>n2 and n1>n3:
5)     print("Biggest Number is:",n1)
6) elif n2>n3:
7)     print("Biggest Number is:",n2)
8) else :
9)     print("Biggest Number is:",n3)
```

D:\Python_classes>py test.py
Enter First Number:10
Enter Second Number:20
Enter Third Number:30
Biggest Number is: 30

D:\Python_classes>py test.py
Enter First Number:10
Enter Second Number:30
Enter Third Number:20
Biggest Number is: 30

- Q) Write a program to find smallest of given 2 numbers?
- Q) Write a program to find smallest of given 3 numbers?
- Q) Write a program to check whether the given number is even or odd?

Q) Write a Program to Check whether the given Number is in between 1 and 100?

```
1) n=int(input("Enter Number:"))
2) if n>=1 and n<=10 :
3)     print("The number",n,"is in between 1 to 10")
4) else:
5)     print("The number",n,"is not in between 1 to 10")
```

Q) Write a Program to take a Single Digit Number from the Key Board and Print its Value in English Word?

```
1) 0 → ZERO
2) 1 → ONE
3)
4) n=int(input("Enter a digit from 0 to 9:"))
5) if n==0:
6)     print("ZERO")
7) elif n==1:
8)     print("ONE")
9) elif n==2:
10)    print("TWO")
11) elif n==3:
12)    print("THREE")
13) elif n==4:
14)    print("FOUR")
15) elif n==5:
16)    print("FIVE")
17) elif n==6:
18)    print("SIX")
19) elif n==7:
20)    print("SEVEN")
21) elif n==8:
22)    print("EIGHT")
23) elif n==9:
24)    print("NINE")
25) else:
26)    print("PLEASE ENTER A DIGIT FROM 0 TO 9")
```

II. Iterative Statements

- If we want to execute a group of statements multiple times then we should go for Iterative statements.
- Python supports 2 types of iterative statements.
 - 1) for loop
 - 2) while loop

1) for loop:

If we want to execute some action for every element present in some sequence (it may be string or collection) then we should go for for loop.

Syntax: for x in sequence:

Body

Where sequence can be string or any collection.

Body will be executed for every element present in the sequence.

Eg 1: To print characters present in the given string

```
1) s="Sunny Leone"
2) for x in s :
3)     print(x)
```

Output

S
u
n
n
y

L
e
o
n
e

Eg 2: To print characters present in string index wise:

```
1) s=input("Enter some String: ")
2) i=0
3) for x in s :
4)     print("The character present at ",i,"index is :",x)
5)     i=i+1
```

D:\Python_classes>py test.py

Enter some String: Sunny Leone

The character present at 0 index is : S

The character present at 1 index is : u

The character present at 2 index is : n

The character present at 3 index is : n

The character present at 4 index is : y

The character present at 5 index is :

The character present at 6 index is : L

The character present at 7 index is : e

The character present at 8 index is : o

The character present at 9 index is : n

The character present at 10 index is : e

Eg 3: To print Hello 10 times

```
1) for x in range(10) :  
2)     print("Hello")
```

Eg 4: To display numbers from 0 to 10

```
1) for x in range(11) :  
2)     print(x)
```

Eg 5: To display odd numbers from 0 to 20

```
1) for x in range(21) :  
2)     if (x%2!=0):  
3)         print(x)
```

Eg 6: To display numbers from 10 to 1 in descending order

```
1) for x in range(10,0,-1) :  
2)     print(x)
```

Eg 7: To print sum of numbers present inside list

```
1) list = eval(input("Enter List:"))  
2)     sum=0;  
3)     for x in list:  
4)         sum=sum+x;  
5)     print("The Sum=",sum)
```

D:\Python_classes>py test.py

Enter List:[10,20,30,40]

The Sum= 100

D:\Python_classes>py test.py

Enter List:[45,67]

The Sum= 112

2) while loop:

If we want to execute a group of statements iteratively until some condition false, then we should go for while loop.

Syntax: while condition :
body

Eg: To print numbers from 1 to 10 by using while loop

```
1) x = 1
2) while x <= 10:
3)     print(x)
4) x = x+1
```

Eg: To display the sum of first n numbers

```
1) n=int(input("Enter number:"))
2) sum=0
3) i=1
4) while i<=n:
5)     sum=sum+i
6)     i=i+1
7) print("The sum of first",n,"numbers is :",sum)
```

Eg: Write a program to prompt user to enter some name until entering Durga

```
1) name=""
2) while name!="durga":
3)     name=input("Enter Name:")
4)     print("Thanks for confirmation")
```

Infinite Loops:

```
1) i=0;
2) while True :
3)     i=i+1;
4)     print("Hello",i)
```

Nested Loops:

Sometimes we can take a loop inside another loop, which are also known as nested loops.

```
1) for i in range(4):
2)     for j in range(4):
3)         print("i=",i," j=",j)
```

Output

D:\Python_classes>py test.py

i= 0 j= 0

i= 0 j= 1
 i= 0 j= 2
 i= 0 j= 3
 i= 1 j= 0
 i= 1 j= 1
 i= 1 j= 2
 i= 1 j= 3
 i= 2 j= 0
 i= 2 j= 1
 i= 2 j= 2
 i= 2 j= 3
 i= 3 j= 0
 i= 3 j= 1
 i= 3 j= 2
 i= 3 j= 3

Q) Write a Program to display *'s in Right Angled Triangled Form

```

*
* *
* * *
* * * *
* * * * *
* * * * * *
* * * * * * *
  
```

```

1) n = int(input("Enter number of rows:"))
2) for i in range(1,n+1):
3)     for j in range(1,i+1):
4)         print("*",end=" ")
5)     print()
  
```

Alternative Way

```

1) n = int(input("Enter number of rows:"))
2) for i in range(1,n+1):
3)     print("* " * i)
  
```

Q) Write a Program to display *'s in Pyramid Style
(Also known as Equivalent Triangle)

```

      *
     * *
    * * *
   * * * *
  * * * * *
 * * * * * *
* * * * * * *
  
```

```

1) n = int(input("Enter number of rows:"))
2) for i in range(1,n+1):
3)     print(" " * (n-i),end="")
4)     print("* " * i)
  
```

III. Transfer Statements

1) break:

We can use break statement inside loops to break loop execution based on some condition.

```
1) for i in range(10):
2)     if i==7:
3)         print("processing is enough..plz break")
4)         break
5)     print(i)
```

D:\Python_classes>py test.py

0
1
2
3
4
5
6

processing is enough..plz break

Eg:

```
1) cart=[10,20,600,60,70]
2) for item in cart:
3)     if item>500:
4)         print("To place this order insurance must be required")
5)         break
6)     print(item)
```

D:\Python_classes>py test.py

10
20

To place this order insurance must be required

2) continue:

We can use continue statement to skip current iteration and continue next iteration.

Eg 1: To print odd numbers in the range 0 to 9

```
1) for i in range(10):
2)     if i%2==0:
3)         continue
4)     print(i)
```

D:\Python_classes>py test.py

```
1
3
5
7
9
```

Eg 2:

```
1) cart=[10,20,500,700,50,60]
2) for item in cart:
3)     if item>=500:
4)         print("We cannot process this item :",item)
5)         continue
6)     print(item)
```

D:\Python_classes>py test.py

```
10
20
We cannot process this item : 500
We cannot process this item : 700
50
60
```

Eg 3:

```
1) numbers=[10,20,0,5,0,30]
2) for n in numbers:
3)     if n==0:
4)         print("Hey how we can divide with zero..just skipping")
5)         continue
6)     print("100/{0} = {1}".format(n,100/n))
```

Output

100/10 = 10.0

100/20 = 5.0

Hey how we can divide with zero..just skipping

100/5 = 20.0

Hey how we can divide with zero..just skipping

100/30 = 3.3333333333333335

Loops with else Block:

- Inside loop execution, if break statement not executed, then only else part will be executed.
- else means loop without break.

```
1) cart=[10,20,30,40,50]
2) for item in cart:
3)     if item>=500:
4)         print("We cannot process this order")
5)         break
6)     print(item)
7) else:
8)     print("Congrats ...all items processed successfully")
```

Output

10

20

30

40

50

Congrats ...all items processed successfully

Eg:

```
1) cart=[10,20,600,30,40,50]
2) for item in cart:
3)     if item>=500:
4)         print("We cannot process this order")
5)         break
6)     print(item)
7) else:
8)     print("Congrats ...all items processed successfully")
```

Output

D:\Python_classes>py test.py

10

20

We cannot process this order

Q) What is the difference between for loop and while loop in Python?

- ☐ We can use loops to repeat code execution
- ☐ Repeat code for every item in sequence → for loop
- ☐ Repeat code as long as condition is true → while loop

Q) How to exit from the loop? By using break statement

Q) How to skip some iterations inside loop? By using continue statement.

Q) When else part will be executed wrt loops? If loop executed without break

3) pass statement:

- pass is a keyword in Python.
- In our programming syntactically if block is required which won't do anything then we can define that empty block with pass keyword.

pass

- | - It is an empty statement
- | - It is null statement
- | - It won't do anything

Eg: if True:

SyntaxError: unexpected EOF while parsing

if True: pass → valid

def m1():

SyntaxError: unexpected EOF while parsing

def m1(): pass

Use Case of pass:

Sometimes in the parent class we have to declare a function with empty body and child class responsible to provide proper implementation. Such type of empty body we can define by using pass keyword. (It is something like abstract method in Java)

Eg: def m1(): pass

```
1) for i in range(100):
2)     if i%9==0:
3)         print(i)
4)     else:pass
```

D:\Python_classes>py test.py

```
0
9
18
27
36
45
54
63
72
81
90
99
```

del Statement:

- del is a keyword in Python.
- After using a variable, it is highly recommended to delete that variable if it is no longer required, so that the corresponding object is eligible for Garbage Collection.
- We can delete variable by using del keyword.

```
1) x = 10
2) print(x)
3) del x
```

After deleting a variable we cannot access that variable otherwise we will get NameError.

```
1) x = 10
2) del x
3) print(x)
```

NameError: name 'x' is not defined.

Note: We can delete variables which are pointing to immutable objects. But we cannot delete the elements present inside immutable object.

```
1) s = "durga"
2) print(s)
3) del s → valid
4) del s[0] → TypeError: 'str' object doesn't support item deletion
```

Difference between del and None:

In the case del, the variable will be removed and we cannot access that variable (unbind operation)

```
1) s = "durga"
2) del s
3) print(s) → NameError: name 's' is not defined.
```

But in the case of None assignment the variable won't be removed but the corresponding object is eligible for Garbage Collection (re bind operation). Hence after assigning with None value, we can access that variable.

```
1) s = "durga"
2) s = None
3) print(s) → None
```